


H05V-U 300/500 V & H07V-U/NYA 450/750 V
H05V-U& H07V-UNYA(Solid CU PVC)

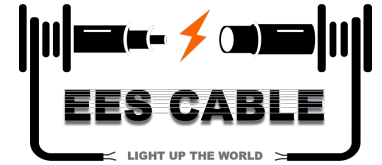

Electric Wire for Connection for Electrical Appliances

Application

The products are suitable for installation indoors, in cable ducts and in industrial plants or switching stations, under ground installation.

HD 21.3/DIN VDE0281-3

- Conductor. Class 1 Copper
- Insulation: PVC



section mm ²	No. of Wires	Insulation Thickness mm	Overall Diameter mm	Cable Weight kg/km	Electrical Resistance DC.20°C Ω/km
H05V-U 300/500 V					
0.75	1	0.6	2.2	11	24.5
1	1	0.6	2.6	14	18.1
H07V-U/NYA 450/750V					
1.5	1	0.7	3.2	19	12.1
2.5	1	0.8	3.9	30	7.41
4	1	0.8	4.4	45	4.61
6	1	0.8	5.0		3.08
10	1	1.0	6.4	107	1.83